


PROBOARD is designed as a replacement/option for hardboard.

80 mil - and denser than hardboard - PROBOARD stands up well to heavier construction conditions and machinery.

PROBOARD is designed specifically for the CONSTRUCTION PROFESSIONAL and provides superior protection against impacts, spills and punctures.

Tru-Lay-Flat sheets are non-staining and vapor permeable.

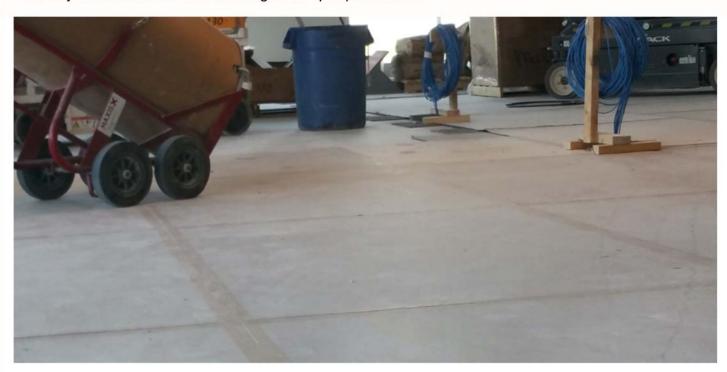

FEATURES

Fire Rated 100% Recyclable
Vapor Permeable Easy Install & Removal
Tru-Lay Flat Sheets Non-Abrasive
Non-Staining Patented
LEED Compliant Made in USA

SIZES

4'x6' (48in x 72in) and 4'x8' (48in x 96in)

APPLICATIONS

Construction Remodeling

Maintenance Tenant Improvements

INSTRUCTIONS

Clean surface well before installation.
Align PROBOARD edge to edge. Tape along seams.
Cut to fit with utility knife. If floor is still curing DO NOT overlap or tape. DO NOT tape directly to floor. If running machinery/equipment stagger sheets like brickwork.

PRODUCT SPECIFICATIONS

Thickness 80 mil

Fire Rated ASTM E648 Class II
Material 100% recycled

laminated paperboard

Weight/Sheet 7lbs/9lbs Size 4'x6' & 4'x8'

Density (lbs/1000 sq. ft) 296 Density (Kg/M3 cubic meter) 697 Ph Neutral Color Natural Inks/Dyes No Country of Origin USA **LEED Compliant** Yes Recyclable 100% Vapor Permeable Yes

All information contained in this document was obtained from sources that PROTEX* Products (PROTEX) believes reliable and is provided for guidance by experienced industry professionals. This information is provided without any implied or expressed warranty regarding merchantability of fitness, completeness, or accuracy. As conditions, usage, application, and installation are beyond our control, PROTEX shall not be liable for any direct, indirect, consequential or punitive damages in any way related to the above mentioned information or to the handling, storage, use, performance or disposal of the product. PROTEX PROTECT PR



